


ADHESIVE MIXER

Type LMX for installation on applicator

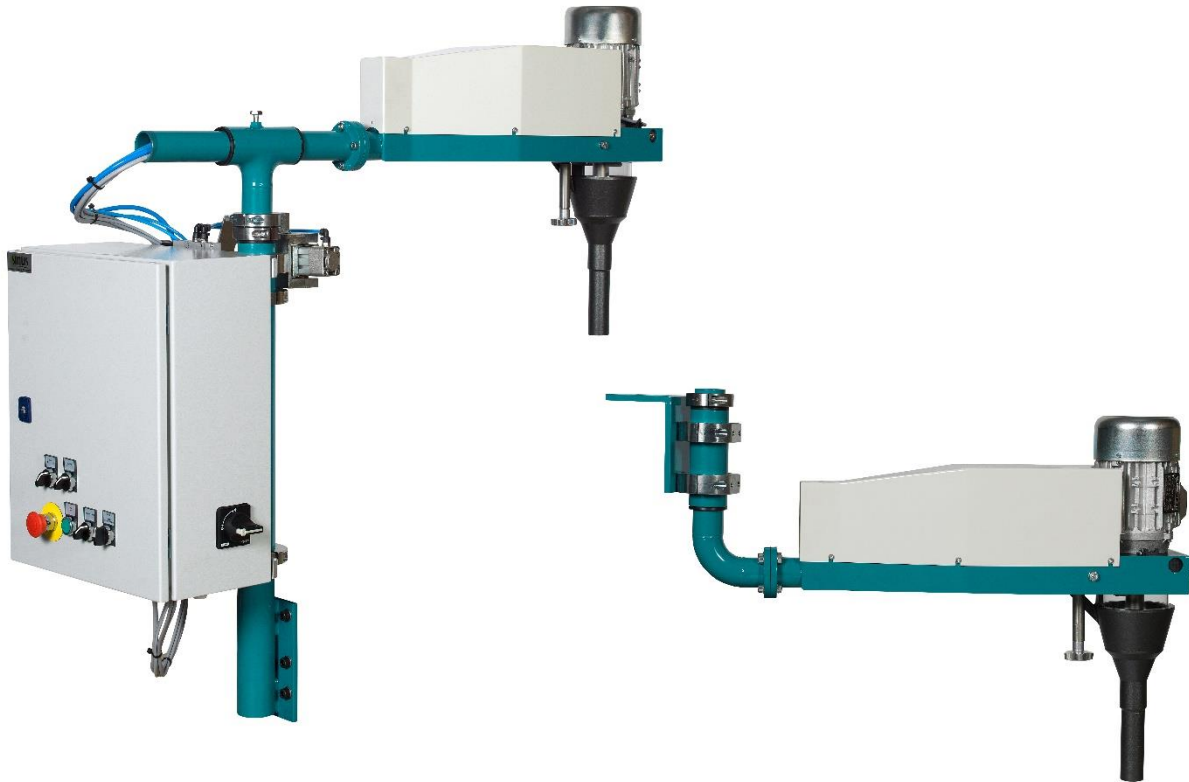

- The adhesive mixer is used for dynamic mixing of 2-component water-based adhesive.
- Adhesive pump with fixed speed and hardening agent pump with variable speed ensure correct adjustment of mixing proportion.
- The adhesive and the hardening agent are not in contact until they are mixed in the discharge funnel, where the mix is in two levels. The funnel and the mixer disc are Teflon coated and very easy to clean.
- An efficient cleaning system makes cleaning simple and avoids waste of adhesive/hardening agent.
- The LMX mixer is extremely simple to operate.
- The LMX mixer has manual or automatic operation.
Tubes and cam couplings for connection to container are included.

Type	Output	RPM	Volume	Connection	Cleaning system	Air connection
Glue pump	0.37 kW	29	2.5 l/min.	1½" RG	To be connected to standard hot water supply	RG 1/4" Max. 8 bar
Hardener pump	0.37 kW	6-33	0.25-1.15 l/min.	1½" RG		
Mixer motor	0.25 kW	1400				

KUNI

MASKINFABRIK A/S

HOLMBLADSVEJ 2
DK-8600 SILKEBORG

E-mail: kuni@kuni.dk



+45 8682 3944



+45 8682 3625

Internet: www.kuni.dk